



Highly Sensitive KF200 20mA Tunable Laser Gas Analyzer TDLAS IP66 Gas Testing

Our Product Introduction

Basic Information

- Place of Origin: Jiangsu, China
- Brand Name: KEILISAIKE
- Model Number: KF-200
- Minimum Order Quantity: 1PC
- Price: \$5,000.00 - \$70,000.00/sets
- Packaging Details: carton for KF200 Laser Absorption Spectroscopy (TDLAS) laser gas analyzer
- Stock: 1PC
- Supply Ability: 500 Set/Sets per Month



Product Specification

- Power: Electronic
- Use: Gas Testing And Analysis System
- Measurement Principle: TDLAS
- Analog Output: 2-wire 4 - 20 MA Signal Input (Isolated, Maximum Load 750Ω)
- Power Supply: 24 V DC (18~36VDC)
- Ambient Temperature: - 30 ~ + 60
- Storage Temperature: - 40 ~ + 80
- Installation Method: In-situ Installation
- Explosion-proof: Exd IIC T6 GB
- EMC: IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4,
- Port: Nanjing
- Highlight: 20mA Tunable Laser Gas Analyzer, IP66 Laser Gas Analyzer, 20mA Tdi Gas Sensor



More Images



Product Description

KF200 Tunable Laser Absorption Spectroscopy (TDLAS) Online Gas Analyzer

The KF200 series laser gas analyzer is developed aiming at industrial on-line analyzing and online environmental monitoring. Based on the semiconductor laser absorption spectroscopy (DLAS) technology, it is developed with features of an integrated design and high level of integration.

There are various types of the KF200 series laser gas analyzer, including in-situ probing type, by-pass type, multi-channel and disc mounted type, etc.

Gases like O₂, CO, NH₃, CO₂, CH₄, H₂O, HC, HF, etc., can all be analyzed. The concentration analyzing of target gases includes the macro-analysis and micro-analysis.


Features and Benefits

- In-situ, no gas sampling
- No cross interference
- Fast response less than 7s
- Diverse optical length (0.5 - 20m)
- Reliable in all harsh conditions: high temperature & pressure, dust density, moisture and corrosion
- Online calibration, no zero drift
- Thousands of tailor-made solutions for various applications

>>> Technical Specifications

Measurement Principle	Tunable Laser Absorption Spectroscopy(TDLAS)	
Technical Data	Linearity	≤ ±1%F.S.
	Span drift	≤ ±1%F.S./6 months
	Repeatability	≤ 1%
	calibration period	≤ 1 time/6 month
	Explosion-proof Grade	Exd IIC T6 Gb
	Protection levels	IP66
Response Time	Warm-up time	≤ 15 min
	Response time(T90)	≤ 8~10s
	Analog outputs	2 outputs 4-20 mA, max signal input(electrically isolated, max. load 750Ω)
Interface Signals	Analog inputs	2-way 4-20mA input (temperature-pressure compensation)
	Communications	RS485/RS232/GPRS
	Relay output	3 outputs relay (24V DC/1A)
	Operation temperature	-30 ~ +60
Operating Conditions	Storage Temperature	-40 ~ +80
	Purge Gas	0.3~0.8 MPa nitrogen gas or instrument air
	Power Supply	200-240 V AC/48-63 Hz, power is base on specific configuration
Installation	Installation Method	Sampling probe is mounted in the flue/pipe, system is installed nearby

>>>Composition Diagram

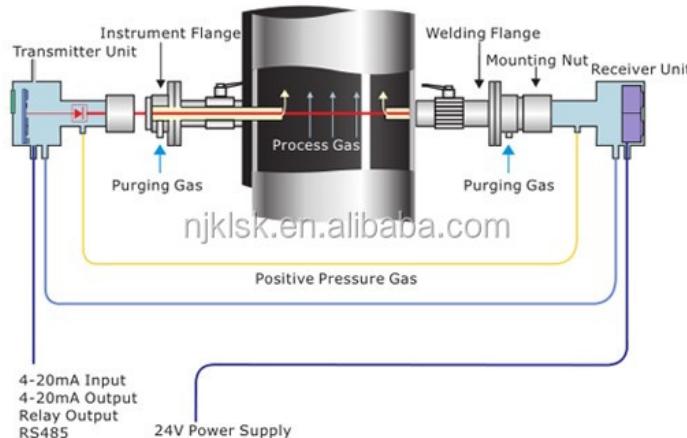


>>> Gas Detection Limits

Detection Gas Type	Detection Limit	Detection range
O ₂	0.01%Vol.	(0-1)%Vol., (0-100)%Vol.

CO ₂	10 ppm	(0-1000)ppm,(0-100)%Vol.
H ₂ S	20 ppm	(0-2000) ppm, (0-100)%Vol.
HCl	0.1 ppm	(0-50) ppm,(0-100)%Vol.
NH ₃	0.1 ppm	(0-10) ppm, (0-100)%Vol.
C ₂ H ₂	0.1ppm	(0-10) ppm, (0-100)%Vol.
CO	10 ppm	(0-1000)ppm, (0-100)%Vol.
H ₂ O	0.3 ppm	(0-50)ppm, (0-100)%Vol.
HF	0.02 ppm	(0-5)ppm, (0-10000) ppm
HCN	0.3 ppm	(0-30)ppm, (0-1)%Vol.
CH ₄	0.4 ppm	(0-40)ppm, (0-100)%Vol.
C ₂ H ₄	0.6 ppm	(0-60)ppm, (0-100)%Vol.

Remark1:The test conditions for 1m optical path, the gas pressure 1bar, gas temperature 300K

Remark2:By increasing the optical path, proportionally lower detection limit

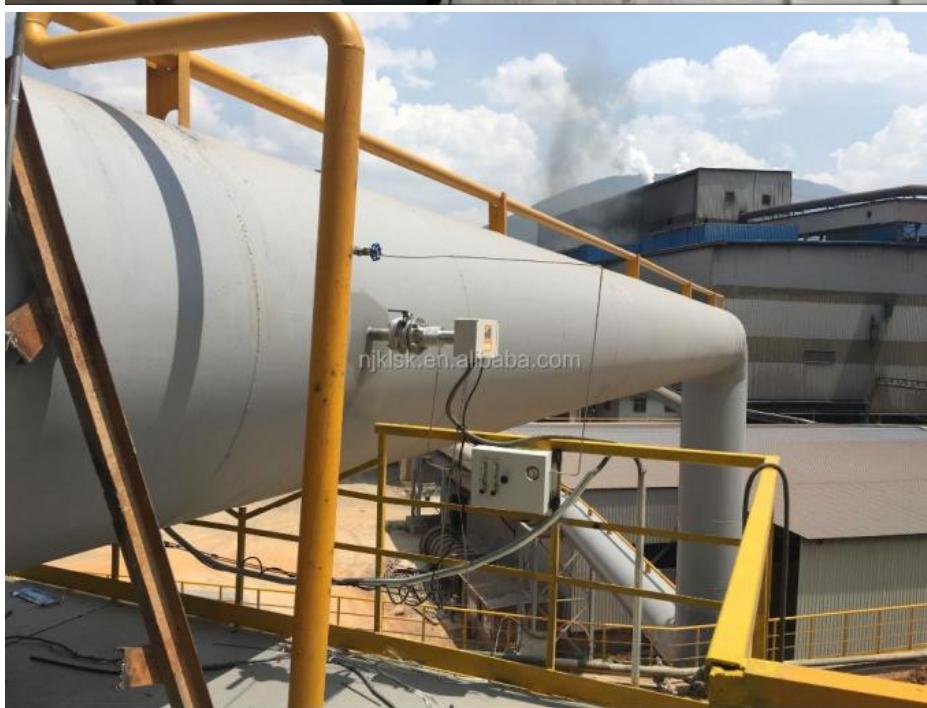



>>> Application Areas

Refinery & Petrochemical

FCC Catalyst Regeneration
SCR NH₃ Injection
Desulfurization Efficiency
Explosive Process Gas
Sulfur Recovery Flue Gas Measurement Outlet of
Process Heaters, Fractionators, Thermal Crackers,
Utility Boilers and Incinerators
Reactant Ratio Optimization
Product Purity
HCl, HF Emission

Metallurgy

Combustion Control for Reheating Furnace, Heat
Treatment Furnace, Forging Furnace
Converter Gas Recycle
Blast Furnace Gas
Coke Oven Gas
Flue Gas of Sintering, Pelletizing
Coal Injection Safety Control
Electric Tar Precipitator (ETP) Safety Control
CDQ Circulating Gas
Gas Tank Safety Control
Calorific Value Analysis
Sulfur Recovery

Thermal Power

SCR NH₃ Injection
Desulfurization Efficiency
Coal Injection Safety Control
HCl, HF Emission

Company Information

Nanjing KELISAIKE Safety Equipment Co., Ltd. is one of the largest safety equipment manufacturers in mainland China, possessing the most complete product range and specifications in the safety equipment industry. Founded in 2004, Nanjing KELISAIKE has three subsidiaries in Beijing, Xi'an and Xinjiang province, and over 30 domestic sales service centers.

Standard products include the K60 series portable single gas detectors, K60-IV series multi gas detectors, K800 series fixed gas transmitters, K500 series wall-mounted gas detectors, K1000 series gas detector control panel units, KL99 series air breathing apparatuses, etc. Nanjing KELISAIKE is also a factory with rich experience in OEM service, providing professional design and manufacturing of customized products. The company's products are widely used in fields of petroleum, chemical, gas transmission and distribution, warehousing, municipal gas supply, fire fighting, environmental protection, metallurgy, pharmacy, energy and power industry.

As a leading enterprise in technology innovation, Nanjing KELISAIKE is committed to developing core competencies by continuous technology research. The company has a team of professional and technical talents, including more than 10 senior technicians and masters, who master quite many core technologies.

Nanjing KELISAIKE has passed ISO 9001 International Quality System Certification. With the guidance and tools of the standard, Nanjing KELISAIKE cannot only ensure that all the company's products and services consistently meet customer's requirements, but also that the quality of the products and services will be consistently improved.

KELISAIKE Faith

People-oriented and technology-driven
KELISAIKE Principle
Quality first, integrity-based



Our Services

- 1.The inquiry and question will be replied within12hours
- 2.High quality with competitive price
- 3.Good after sales service
- 4.Accept OEM
- 5.One of the most professional safety equipment manufacture with a very good and trained team

FAQ

Q: Are you trading company or manufacturer ?

A: We are manufacturer, specializing in design and manufacturing of gas detector and alarm monitoring system.

Q: How about the Delivery time?

A: Samples will be prepared within 5 days after receiving 100% T/T payment in advance. QTY order will be shipped in 20 days.

Q: What kind of payments does KELISAIKE support?

A: T/T, L/C, Western Union and Cash are all accepted.

Q: What's the MOQ?

A: Normally, the MOQ is 10 PCS, but we also can provide samples for quality inspection.

Q: Do you charge for the samples?

A: Yes, we do. According to our company policy, we only charge the samples based on EXW price, and we will return the sample fee in the next qty order.

Q: Can you produce according to customers' design?

A: Sure, we are a professional manufacturer, and OEM order is welcome.





Nanjing Kelisaike Safety Equipment Co., Ltd.

📞 +86 25 8719 3262

✉️ manager@njklsk.cn

🌐 multi-gasdetection.com

Bldg 12, 2 Qingshuiting West Road, Nanjing, Jiangsu, China, 211102